ricky

PRINT MEDIA
DATASHEET KIT

FEATURING

PVC BANNERS

FLOOR GRAPHICS

WALL COVERINGS

ARTIST CANVAS

FABRICS

EXPLORE
PRINT
MEDIA

CONTENTS

RICKYFLEX
510GSM MATTE SEMI-COATED BANNER

ricky

Applications

PREMIUM BANNERS

ROLL-UP BANNERS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

RICKYFLEX
510GSM MATTE SEMI-COATED BANNER

ricky

Description

Rickyflex is a premium semi-coated front-lit PVC banner, ideal for internal and external banner applications. This product is strong, low curl, and has a smooth matte finish.

Applications

PREMIUM BANNERS

ROLL-UP BANNERS

Technical Specifications

Roll Widths	137cm, 160cm, 210cm	**Roll Length**	50m
Finish	Matte	**Nominal Weight**	510gsm
Fabric Type	Semi-coated PVC	**Base Fabric**	Woven 1100dtex Polyester
Fabric Density	8 x 8 threads per cm^2	**Tensile Strength**	Warp: 2300N/50mm Weft: 1900N/50mm
Tearing Strength	Warp: 240N Weft: 200N		

Printing Compatibility

SOL

SOLVENT

ECO

ECO SOLVENT

UV

UV GEL & CURABLE

LAT

LATEX

RICKYFLEX FR
510GSM FIRE RETARDANT MATTE SEMI-COATED BANNER

ricky

Applications

PREMIUM BANNERS

ROLL-UP BANNERS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

RICKYFLEX FR
510GSM FIRE RETARDANT MATTE SEMI-COATED BANNER

Description

Rickyflex FR is a premium semi-coated front-lit PVC banner, ideal for internal and external banner applications. This product is strong, low curl, and has a smooth matte finish.

Applications

PREMIUM BANNERS

ROLL-UP BANNERS

Technical Specifications

Roll Widths	250cm, 320cm, 350cm, 500cm	**Roll Length**	55m
Finish	Matte	**Nominal Weight**	510gsm
Fabric Type	Semi-coated PVC	**Base Fabric**	Woven 1100dtex Polyester
Fabric Density	8 x 8 threads per cm^2	**Tensile Strength**	Warp: 2300N/50mm Weft: 1900N/50mm
Tearing Strength	Warp: 240N Weft: 200N		

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

RICKYTRANS
610GSM BACKLIT SEMI-COATED FLEXFACE PVC BANNER

ricky

Applications

BACKLIT BILLBOARDS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

RICKYTRANS
610GSM BACKLIT SEMI-COATED FLEXFACE PVC BANNER

ricky

Description

Rickytrans is a coated backlit PVC banner ideal for backlit signs.

Applications

BACKLIT BILLBOARDS

Technical Specifications

Roll Widths	137cm, 160cm, 203cm, 250cm, 320cm, 500cm	**Roll Length**	50m
Finish	Satin	**Nominal Weight**	610gsm
Fabric Type	Semi-coated PVC	**Base Fabric**	Woven 1000dtex Polyester
Fabric Density	20 x 20 threads per square inch	**Breaking Strength**	Warp: 2200N/50mm Weft: 2550N/50mm
Tearing Strength	Warp: 350N Weft: 320N		

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

USB ULTRA SMOOTH
440GSM MATTE SEMI-COATED PVC BANNER

ricky

Applications

ROLL-UP BANNERS　　**FIXED BANNERS**　　**DISPLAY SCREENS**

Printing Compatibility

SOL　　**ECO**　　**UV**　　**LAT**

SOLVENT　　**ECO-SOLVENT**　　**UV GEL & CURABLE**　　**LATEX**

USB ULTRA SMOOTH
440GSM MATTE SEMI-COATED PVC BANNER

ricky

Description

USB Ultra Smooth is a semi-coated blockout banner fabric suitable for both indoor and short-term outdoor projects. It features an ultra smooth surface on both sides and is printable on both sides.

Applications

ROLL-UP BANNERS   FIXED BANNERS   DISPLAY SCREENS

Technical Specifications

Roll Widths	137cm, 160cm, 250cm, 320cm	**Roll Length**	50m
Finish	Matte	**Nominal Weight**	440gsm
Fabric Type	Semi-coated PVC	**Base Fabric**	Woven 250 denier polyester
Fabric Density	14 x 14 threads per cm^2		

Printing Compatibility

SOL   ECO   UV   LAT

SOLVENT   ECO SOLVENT   UV GEL & CURABLE   LATEX

BL610
610GSM SATIN BLOCKOUT PVC BANNER

ricky

Applications

INDOOR BANNERS

OUTDOOR BANNERS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

BL610
610GSM SATIN BLOCKOUT PVC BANNER

ricky

Description

BL610 is a satin smooth blockout PVC banner, ideal for both double sided and single sided indoor and outdoor banners.

Applications

INDOOR BANNERS

OUTDOOR BANNERS

Technical Specifications

Roll Widths	250cm, 320cm, 500cm	**Roll Length**	55m
Finish	Satin	**Nominal Weight**	610gsm
Fabric Type	Semi-coated PVC	**Base Fabric**	Woven 1000dtex polyester
Fabric Density	20 x 20 threads per square inch	**Breaking Strength**	Warp: 2200N/50mm Weft: 2550N/50mm
Tearing Strength	Warp: 350N Weft: 320N		

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

BL610 FR
610GSM FIRE RETARDANT SATIN BLOCKOUT PVC BANNER

ricky

Applications

🏠 **INDOOR BANNERS**

🖼 **OUTDOOR BANNERS**

Printing Compatibility

SOL SOLVENT

ECO ECO-SOLVENT

UV UV GEL & CURABLE

LAT LATEX

BL610 FR
610GSM FIRE RETARDANT SATIN BLOCKOUT PVC BANNER

ricky

Description

BL610 FR is a satin smooth blockout PVC banner, ideal for both double sided and single sided indoor and outdoor banners.

Applications

INDOOR BANNERS

OUTDOOR BANNERS

Technical Specifications

Roll Widths	250cm, 320cm, 500cm	Roll Length	55m
Finish	Satin	Nominal Weight	610gsm
Fabric Type	Semi-coated PVC	Base Fabric	Woven 1000dtex polyester
Fabric Density	20 x 20 threads per square inch	Breaking Strength	Warp: 2200N/50mm Weft: 2550N/50mm
Tearing Strength	Warp: 350N Weft: 320N		

Printing Compatibility

SOL — SOLVENT

ECO — ECO SOLVENT

UV — UV GEL & CURABLE

LAT — LATEX

BACKLINER MESH PLUS
270GSM PVC COATED POLYESTER MESH WITH A LINER

ricky

Applications

- **PERIMETER FENCING**
- **BUILDING WRAPS**
- **WINDOW BANNERS**
- **DISPLAY SCREENS**

Printing Compatibility

- **SOL** — SOLVENT
- **ECO** — ECO-SOLVENT
- **UV** — UV GEL & CURABLE
- **LAT** — LATEX

BACKLINER MESH PLUS
270GSM PVC COATED POLYESTER MESH WITH A LINER

ricky

Description

Backliner Mesh is a PVC coated polyester mesh ideal for applications that require light or wind to filter through. The release liner allows banners to be printed without ink flow through.

Applications

PERIMETER FENCING	BUILDING WRAPS	WINDOW BANNERS	DISPLAY SCREENS

Technical Specifications

Roll Widths	137cm, 160cm, 250cm	**Roll Lengths**	50m, 55m*
Finish	Matte	**Nominal Weight**	270gsm
Fabric Type	Dipped PVC	**Base Fabric**	Woven 1100dtex polyester
Fabric Density	4.7 x 4.7 threads per cm^2		

*50m roll length is available in 137cm, 160cm & 250cm roll widths.
55m roll length is available in 160cm & 250cm roll widths.

Printing Compatibility

SOL	ECO	UV	LAT
SOLVENT	ECO SOLVENT	UV GEL & CURABLE	LATEX

PROMOMESH FR
270GSM FIRE RETARDANT PVC COATED MESH

ricky

Applications

PERIMETER FENCING

BUILDING WRAPS

WINDOW BANNERS

DISPLAY SCREENS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

PROMOMESH FR
270GSM FIRE RETARDANT PVC COATED MESH

ricky

Description

Promomesh FR is a PVC coated mesh ideal for perimeter fencing, building wraps, window banners and display screens.

Applications

PERIMETER FENCING   BUILDING WRAPS   WINDOW BANNERS   DISPLAY SCREENS

Technical Specifications

Roll Widths	160cm, 183cm, 250cm, 320cm, 500cm	**Roll Lengths**	55m, 110m*
Finish	Matte	**Nominal Weight**	270gsm
Fabric Type	PVC Coated Mesh	**Base Fabric**	Woven 1000dtex polyester
Fabric Density	12 x 12 threads per cm^2		

*55m roll length is available in 160cm, 183cm, 250cm, 320cm & 500cm roll widths.
110m roll length is available in 160cm & 183cm roll widths.

Printing Compatibility

SOL   ECO   UV   LAT

SOLVENT   ECO SOLVENT   UV GEL & CURABLE   LATEX

G-FLOOR
2440GSM LONG TERM FLOORING

ricky

Applications

RETAIL POS
& HOSPITALITY

TRADE SHOWS &
SHOW ROOMS

STAGES, TV SETS
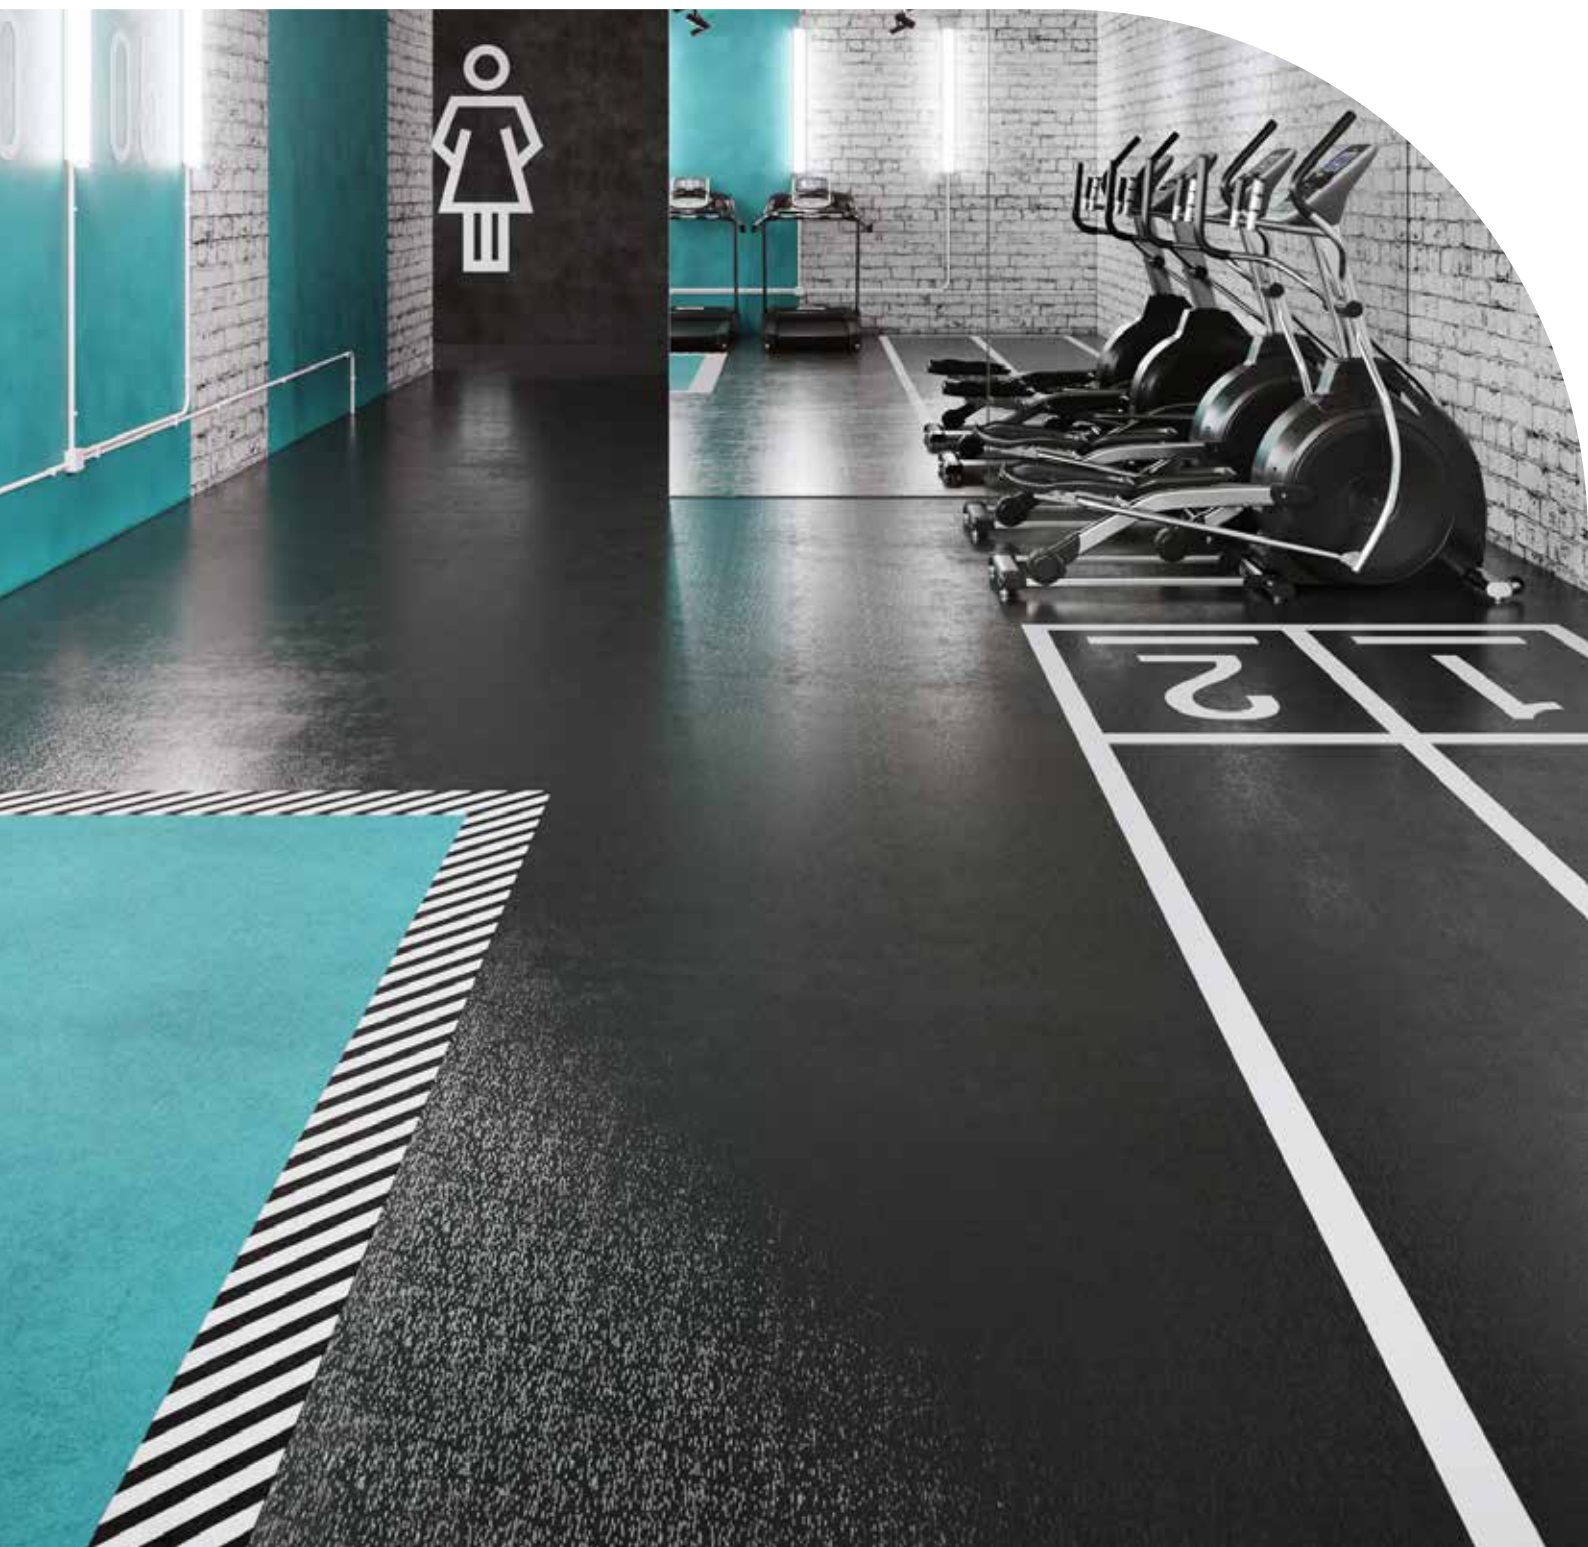& MOVIE SETS

MUSEUMS &
GALLERIES

**Printing
Compatibility**

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

G-FLOOR
2440GSM LONG TERM FLOORING

ricky

Description

Highly durable, premium printable floor graphics that are reusable, easy to clean and don't require adhesive. G-Floor is slip, tear, chemical and waterproof.

Applications

RETAIL POS & HOSPITALITY	TRADE SHOWS & SHOW ROOMS	STAGES, TV SETS & MOVIE SETS	MUSEUMS & GALLERIES

Technical Specifications

Roll Widths	152cm, 304cm	**Roll Length**	18.59m
Finish	Ceramic Matte	**Nominal Weight**	2440gsm
Thickness	1.90mm	**Fabric Type**	100% Polyvinyl

Printing Compatibility

SOL	ECO	UV
SOLVENT	ECO SOLVENT	UV GEL & CURABLE

DreamScape®

TYPE I WALLCOVERINGS (13OZ / 300GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

TYPE I WALLCOVERINGS (13OZ / 300GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

A light weight, embossed wallcovering for long term decoration. DreamScape® Type I wallcoverings are cost effective and suitable for most commercial applications. These products should be installed with commercial grade adhesives.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	**Roll Length**	45.72m
Finishes	Canvas, Matte, Mystical, Suede	**Nominal Weight**	13OZ/300gsm
Face	Embossed PVC	**Backing**	Woven Polyester/Cotton
Fire Retardant	AS/NZS 3837:1998	**Treatment**	Mould, Mildew & Fungal Resistant

Printing Compatibility

SOL	ECO	UV	LAT
SOLVENT	ECO SOLVENT	UV GEL & CURABLE	LATEX

DreamScape®

R ricky

TYPE II WALLCOVERINGS (20OZ / 440GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

TYPE II WALLCOVERINGS (20OZ / 440GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

A medium weight, embossed wallcovering for long term decoration. DreamScape® Type II wallcoverings are cost effective and suitable for most commercial applications. These products should be installed with commercial grade adhesives.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	Roll Length	45.72m
Finishes	Artist Canvas, Canvas, Grasscloth, Matte, Mystical, Sandblast, Silk, Suede	Nominal Weight	20OZ/440gsm
Face	Embossed PVC	Backing	Polyester Non Woven
Fire Retardant	AS/NZS 3837:1998	Treatment	Mould, Mildew & Fungal Resistant

Printing Compatibility

SOL	ECO	UV	LAT
SOLVENT	ECO SOLVENT	UV GEL & CURABLE	LATEX

DreamScape®

TYPE III WALLCOVERINGS (350Z / 793GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

ricky

TYPE III WALLCOVERINGS (350Z / 793GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

A heavy duty, embossed wallcovering for high traffic environments. DreamScape® Type III wallcoverings are durable and suitable for most commercial applications. These products should be installed with commercial grade adhesives.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	Roll Length	45.72m
Finish	Linen	Nominal Weight	350Z/793gsm
Face	Embossed PVC	Backing	Woven Polyester/Cotton
Fire Retardant	AS/NZS 3837:1998	Treatment	Mould, Mildew & Fungal Resistant

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

SPECIAL EFFECTS (440GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

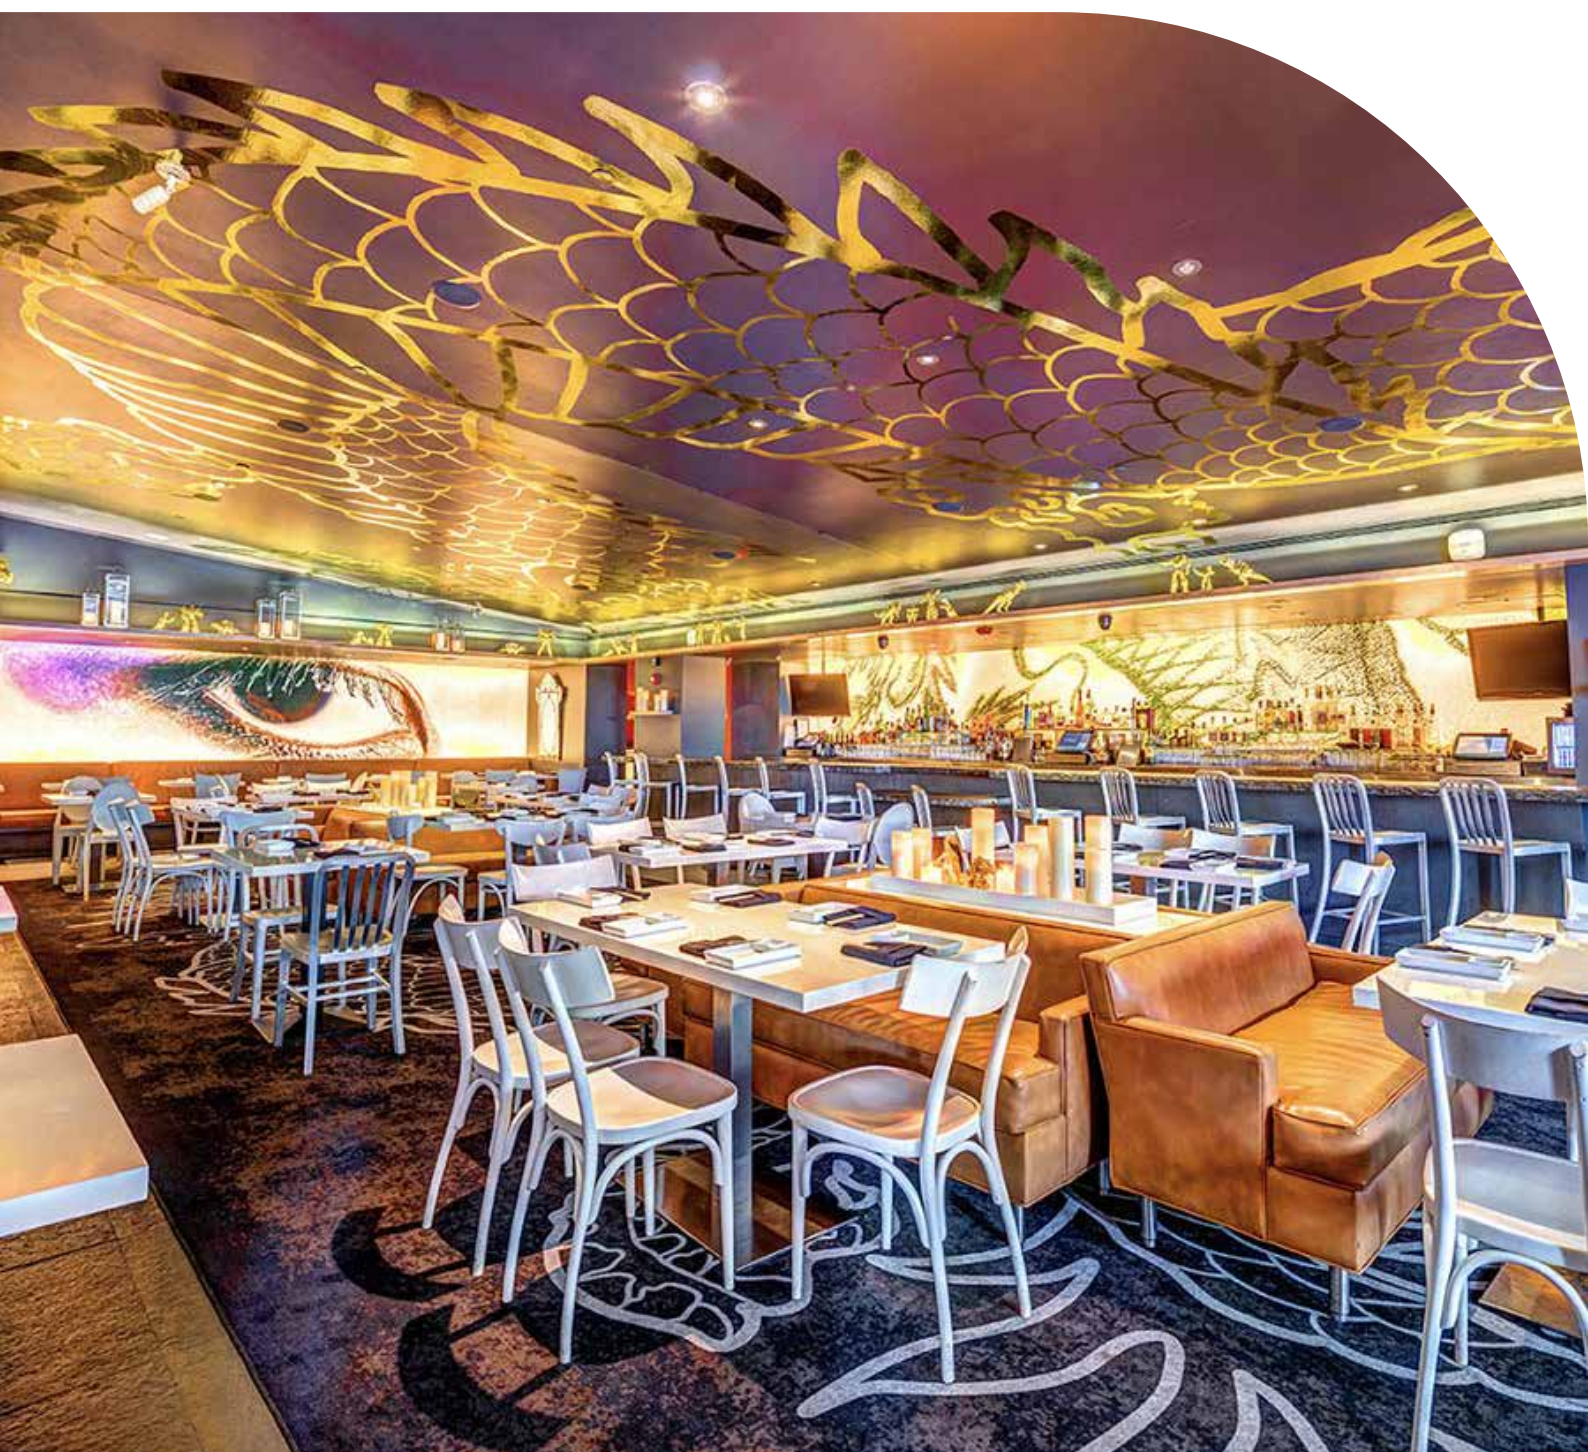**SOL**
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

ricky

SPECIAL EFFECTS (440GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

DreamScape® Special Effects offers a premium range of high quality, reflective wall coverings. With its superior finish, this collection is ideal for creating striking wall graphics and impressive wide-format murals.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	**Roll Length**	45.72m
Finishes	Gold Flash*, Satara Steel	**Nominal Weight**	440gsm
Face	Polyester / PVC	**Backing**	Polyester Non Woven
Fire Retardant	AS/NZS 3837:1998	**Treatment**	Mould, Mildew & Fungal Resistant

*Gold Flash is compatible with UV printing only. Satara Steel is compatible with all printing types listed below.

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

ricky

SUSTAINABLE (315GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape®

SUSTAINABLE (315GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

DreamScape Sustainable offers an eco-friendly solution for stunning and durable wall graphics, featuring a range of sustainable materials to minimise environmental impact without compromising on quality.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	Roll Length	45.72m
Finishes	Terralon	Nominal Weight	315gsm
Material	100% Terralon (Polyester/ natural fibre technology)	Fire Retardant	AS/NZS 3837:1998
Treatment	Mould, Mildew & Fungal Resistant		

Printing Compatibility

SOL	ECO	UV	LAT
SOLVENT	ECO SOLVENT	UV GEL & CURABLE	LATEX

DreamScape®

ricky

NOVALON® (13OZ/457GSM)
COMMERCIAL GRADE WALLCOVERINGS

Applications

WALLCOVERINGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

DreamScape

ricky
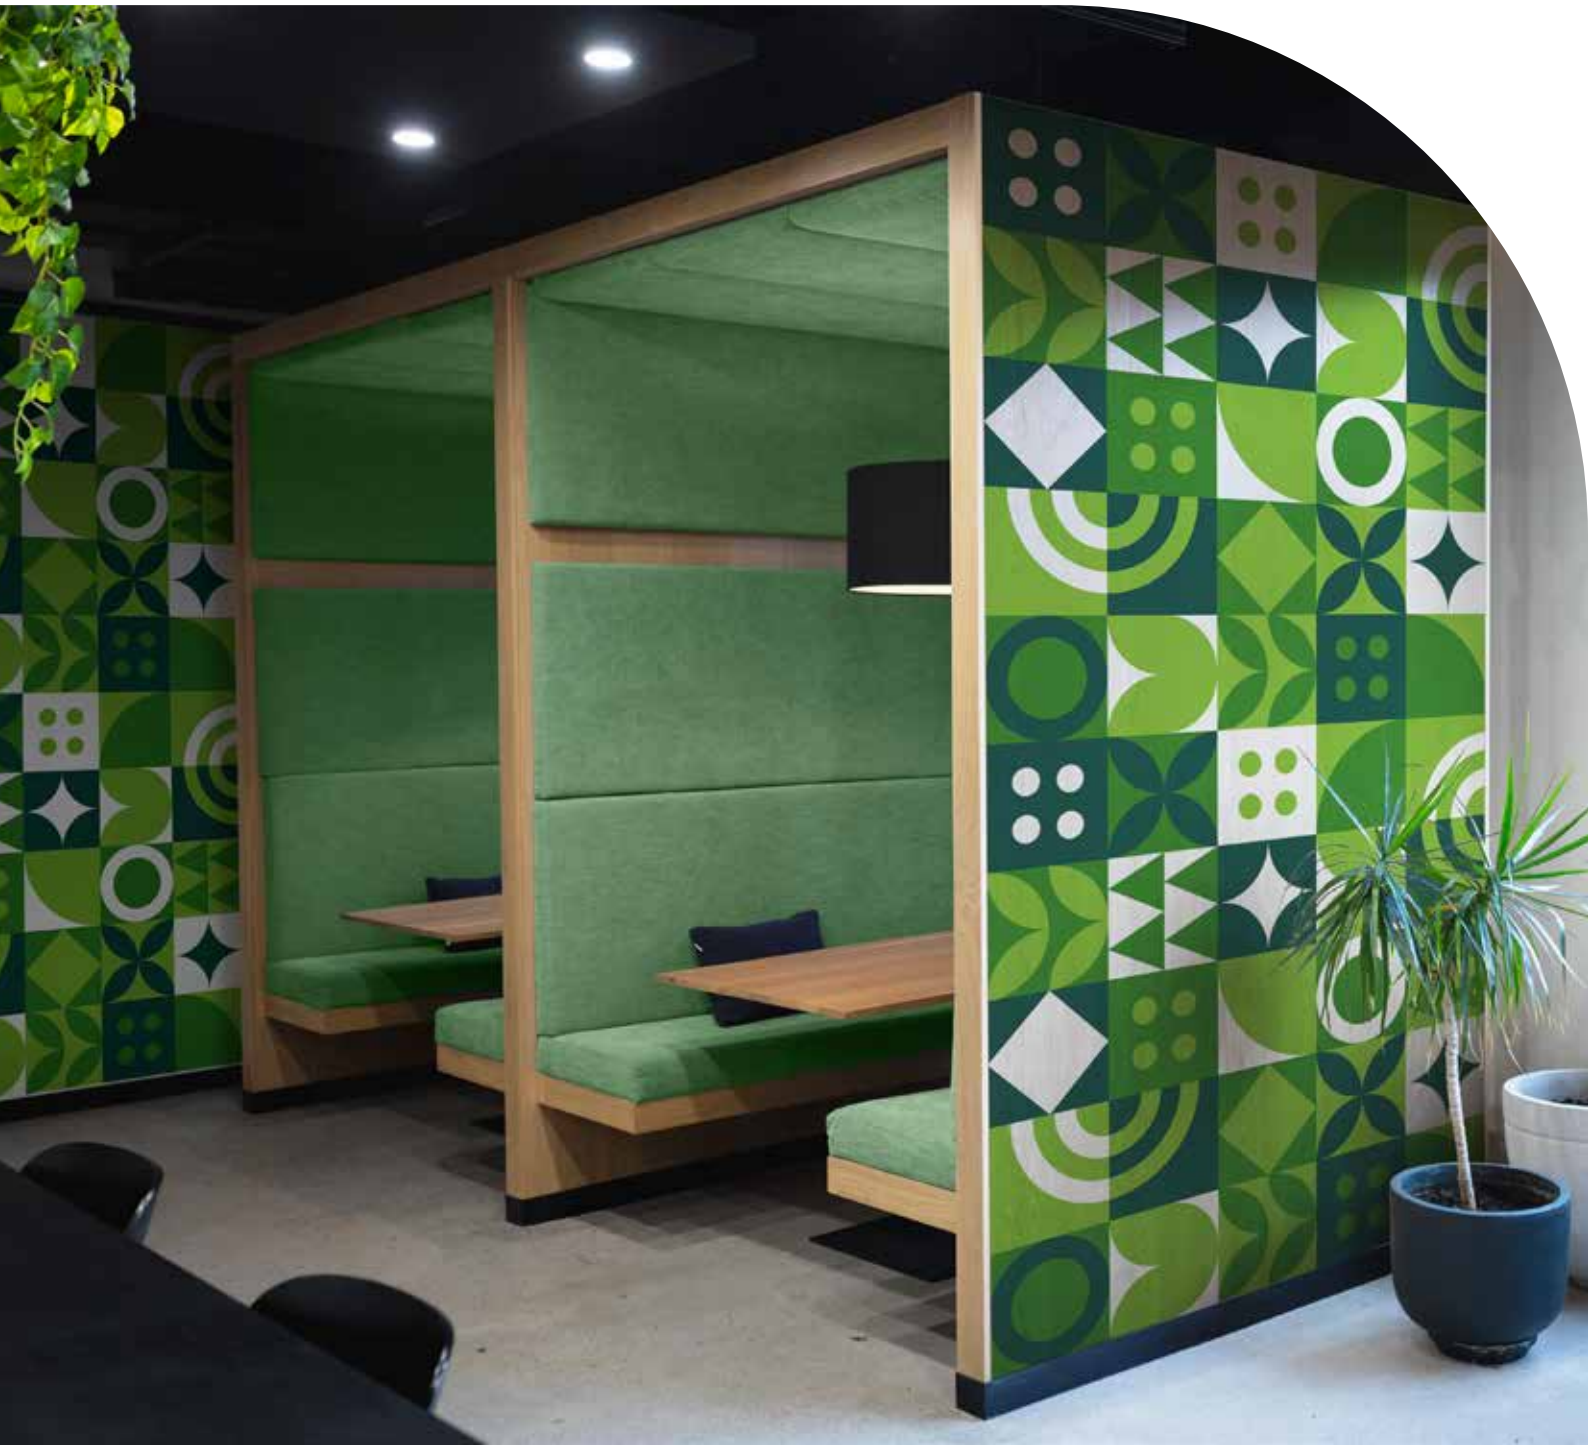
NOVALON® (13OZ/457GSM)
COMMERCIAL GRADE WALLCOVERINGS

Description

DreamScape® Novalon® is a low VOC and olefin based commercial wallcovering, providing superior embossing depth and definition, high level durability characteristics, and ease of installation. Novalon® is an affordable, sustainable and no compromise alternative to vinyl.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	Roll Length	45.72m
Finish	Tapestry	Nominal Weight	13OZ/457gsm
Material	100% Olefin (including 15% recycled content)	Fire Retardant	AS/NZS 3837:1998
Treatment	Mould, Mildew & Fungal Resistant		

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

WALLWRAPS (330 MICRON)   CAVIAR
PERMANENTLY REMOVABLE WALL COVERINGS

DreamScape®

WALLWRAPS (330 MICRON)   CAVIAR
PERMANENTLY REMOVABLE WALL COVERINGS

Description

A textured, permanently removable wall covering. This product can be re-applied multiple times and can be used on walls, over mouldings and around corners. It is 2-4 times thicker and more durable than other wraps.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	**Roll Length**	45.72m
Texture	Caviar	**Film Thickness**	330 Micron Textured PVC
Adhesive	Removable, Acrylic Based, Fire Retardant	**Fire Retardant**	AS/NZS 3837:1998

Printing Compatibility

SOL
SOLVENT

UV
UV CURABLE

LAT
LATEX

DreamScape®

ricky

WALLWRAPS (280 MICRON) CLASSIC
PERMANENTLY REMOVABLE WALL COVERINGS

DreamScape®

R ricky

WALLWRAPS (280 MICRON)   CLASSIC
PERMANENTLY REMOVABLE WALL COVERINGS

Description

A textured, permanently removable wall covering. This product can be re-applied multiple times and can be used on walls, over mouldings and around corners. It is 2-4 times thicker and more durable than other wraps.

Applications

WALLCOVERINGS

Technical Specifications

Roll Width	137cm	**Roll Length**	45.72m
Texture	Classic	**Film Thickness**	280 Micron Smooth PVC
Adhesive	Removable, Acrylic Based, Fire Retardant	**Fire Retardant**	AS/NZS 3837:1998

Printing Compatibility

SOL
SOLVENT

UV
UV CURABLE

LAT
LATEX

FREDRIX SELECT
340GSM MATTE ARCHIVAL QUALITY ARTIST CANVAS

ricky

Applications

FINE ART
REPRODUCTIONS

MUSEUM &
GALLERY DISPLAYS

**Printing
Compatibility**

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

FREDRIX SELECT
340GSM MATTE ARCHIVAL QUALITY ARTIST CANVAS

ricky

Description

A premium, polyester/cotton artist canvas with a matte acrylic top coating.

Applications

FINE ART REPRODUCTIONS

MUSEUM & GALLERY DISPLAYS

Technical Specifications

Roll Widths	137cm, 157cm, 185cm, 264cm & 320cm	**Roll Length**	22.86m
Finish	Matte acrylic top coat	**Nominal Weight**	340gsm
Thickness	444 micron	**Fabric Type**	65% polyester / 35% cotton

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

STARLIGHT DISPLAY FR
230GSM FIRE RETARDANT KNITTED POLYESTER DISPLAY TEXTILE

Applications

LED LIGHT BOXES

DISPLAY SYSTEMS

Printing Compatibility

DYE
DYE SUB TRANSFER

DYE
DYE SUB DIRECT

UV
UV GEL & CURABLE

LAT
LATEX

STARLIGHT DISPLAY FR
230GSM FIRE RETARDANT KNITTED POLYESTER DISPLAY TEXTILE

ricky

Description

A universal knitted polyester textile with some stretch and good opacity.

Applications

LED LIGHT BOXES

DISPLAY SYSTEMS

Technical Specifications

Roll Widths	320cm	**Roll Length**	50m
Finish	Matte	**Nominal Weight**	230gsm
Stretch	Length up to 1.8% Width up to 1.8%	**Fabric Type**	100% polyester

Printing Compatibility

SOL — SOLVENT

ECO — ECO SOLVENT

UV — UV GEL & CURABLE

LAT — LATEX

be.tex ECO DISPLAY FR
210GSM FIRE RETARDANT KNITTED POLYESTER TEXTILE

ricky

Applications

FRAME SYSTEMS & POP-UP DISPLAYS

ROLL-UP BANNERS

X-KITE BANNERS

BANNERS

Printing Compatibility

DYE — DYE SUB TRANSFER

DYE — DYE SUB DIRECT

UV — UV GEL & CURABLE

LAT — LATEX

be.tex ECO DISPLAY FR
210GSM FIRE RETARDANT KNITTED POLYESTER TEXTILE

ricky

Description

A heat set, fire retardant knitted polyester digital printing textile with some stretch.

Applications

FRAME-SYSTEMS & POP-UP DISPLAYS	ROLL-UP BANNERS	X-KITE BANNERS	BANNERS

Technical Specifications

Roll Widths	160cm, 260cm, 320cm	**Roll Length**	100m
Thickness	410 micron	**Nominal Weight**	210gsm
Stretch	Length up to 1-2% Width up to 2-3%	**Fabric Type**	Knitted polyester

Printing Compatibility

DYE SUB TRANSFER	DYE SUB DIRECT	UV GEL & CURABLE	LATEX

be.tex EXPANDABLE FR
180GSM FIRE RETARDANT KNITTED POLYESTER TEXTILE

ricky

Applications

FRAME SYSTEMS
& POP-UP DISPLAYS

TABLECLOTHS

CHAIR COVERS

Printing Compatibility

DYE

DYE SUB TRANSFER

DYE

DYE SUB DIRECT

LAT

LATEX

be.tex EXPANDABLE FR
180GSM FIRE RETARDANT KNITTED POLYESTER TEXTILE

ricky

Description

A heat set, fire retardant knitted polyester digital printing textile with high elasticity.

Applications

FRAME-SYSTEMS
& POP-UP DISPLAYS

TABLECLOTHS

CHAIR COVERS

Technical Specifications

Roll Width	320cm	**Roll Length**	80m
Thickness	430 micron	**Nominal Weight**	180gsm
Stretch	Length up to 3% Width up to 8%	**Fabric Type**	Knitted polyester

Printing Compatibility

DYE

DYE SUB
TRANSFER

DYE

DYE SUB
DIRECT

LAT

LATEX

AURORA BACKLIT PLUS FR
190GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

ricky

Applications

SEG LIGHT BOXES

FRAME SYSTEMS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

AURORA BACKLIT PLUS FR
## 190GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

Description

A high performance woven polyester backlit textile, designed to long lasting, high definition prints. 100% recyclable.

Applications

SEG LIGHT BOXES

FRAME SYSTEMS

Technical Specifications

Roll Width	320cm	**Roll Length**	100m
Finish	Matte	**Nominal Weight**	190gsm
Fabric Type	Woven polyester	**Stretch Capacity**	Length up to 0.8% Width up to 3.0%

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

be.tex® SAMBA® FR
195GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

ricky

Applications

LIGHT BOXES

FRAME SYSTEMS &
POP-UP DISPLAYS

INFLATABLES &
BEAN BAGS

**Printing
Compatibility**

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

be.tex® SAMBA® FR
## 195GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

ricky

Description

A coated, fire retardant woven polyester digital printing textile. It delivers stunning colour vibrancy and sharp detail.

Applications

LIGHT BOXES

FRAME SYSTEMS & POP-UP DISPLAYS

INFLATABLES & BEAN BAGS

Technical Specifications

Roll Sizes	160cm x 70m, 260cm x 100m, 320cm x 100m, 500cm x 50m		
Finish	Matte	**Nominal Weight**	195gsm
Fabric Type	Woven polyester	**Stretch Capacity**	Length up to 1.6% Width up to 2.0%

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

be.tex® LUMINA FR
190GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

ricky

Applications

LIGHT BOXES

FRAME SYSTEMS & POP-UP DISPLAYS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

be.tex® LUMINA FR
## 190GSM FIRE RETARDANT WOVEN POLYESTER TEXTILE

Description

A coated, fire retardant woven polyester digital printing textile. It delivers stunning colour vibrancy and sharp detail.

Applications

LIGHT BOXES

FRAME SYSTEMS &
POP-UP DISPLAYS

Technical Specifications

Roll Widths	160cm, 320cm	**Roll Lengths**	100m
Finish	Matte	**Nominal Weight**	190gsm
Fabric Type	Woven polyester	**Stretch Capacity**	Length up to 2.4% Width up to 6.0%

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

PANTHER BLACKBACK
260GSM FIRE RETARDANT KNITTED POLYESTER BLOCKOUT TEXTILE

ricky

Applications

BACKDROPS | POP-UP FRAMES | EXHIBITIONS | DISPLAY SYSTEMS

Printing Compatibility

SOL | ECO | UV | LAT
SOLVENT | ECO-SOLVENT | UV GEL & CURABLE | LATEX

PANTHER BLACKBACK
260GSM FIRE RETARDANT KNITTED POLYESTER BLOCKOUT TEXTILE

ricky

Description

Panther Blackback is a knitted polyester blockout textile with black foam backing. Ideal for backdrops, pop-up frames, exhibitions, display systems.

Applications

BACKDROPS

POP-UP FRAMES

EXHIBITIONS

DISPLAY SYSTEMS

Technical Specifications

Roll Width	320cm	**Roll Length**	100m
Finish	Matte	**Nominal Weight**	260gsm
Fabric Type	Blockout knitted polyester	**Stretch Capacity**	Length up to 4.0% Width up to 3.0%

Printing Compatibility

SOL

SOLVENT

ECO

ECO SOLVENT

UV

UV GEL & CURABLE

LAT

LATEX

FLAG 130
130GSM FIRE RETARDANT KNITTED POLYESTER FABRIC

ricky

Applications

FLAGS

Printing Compatibility

SOL
SOLVENT

ECO
ECO-SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX

FLAG 130
130GSM FIRE RETARDANT KNITTED POLYESTER FABRIC

ricky

Description

Flag 130 is a durable knitted polyester fabric that is ideal for flags and teardrop banners. Flag 130 is heavy weight, crease resistant and anti-static.

Applications

FLAGS

Technical Specifications

Roll Width	310cm	Roll Length	200m
Finish	Matte	Nominal Weight	130gsm
Fabric Type	Knitted polyester		

Printing Compatibility

SOL
SOLVENT

ECO
ECO SOLVENT

UV
UV GEL & CURABLE

LAT
LATEX